KWICKSEAL™ GT

Self Adhesive Butyl Non-Woven Tape

Product Data Sheet

DESCRIPTION

KWICKSEAL™ GT is a self-adhesive butyl tape with non-woven polyester/polypropylene fleece top and bottom with butyl adhesive, which is designed to create waterproof and vapor-tight joints. It has excellent adhesion on metals, glass, pvc, timber, concrete, cement bonded particle boards, drywalls, ceramics, masonry porous and non-porous surfaces and create waterproof and vapor-tight joints. The top fleece bonds excellently with paint, coatings, plaster and other adhesives.

PRODUCT BENEFITS

Waterproof
Excellent adhesion and instantly watertight.

Flexible
Excellent cold flexibility up to -40°C and maximum 100°C.

Cold Applied
Eliminates fire hazard during application.

Do-It-Yourself
Installs easily without any tar, torches, mops, glues or fasteners.

Saves Time
Saves time, material, labour and utility cost.

Multipurpose
Multipurpose and multi-surface application.

PRODUCT FEATURES

AVAILABLE PACKS

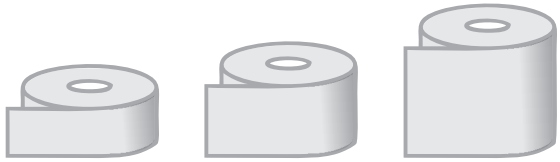

50mm 100mm 150mm

All variants have standard thickness of 1mm and length of 10 meters/roll.

RECOMMENDED USAGE

- For sealing wall-to-floor joints and around drains in wetrooms.
- For sealing cracks prior to plastering.
- For sound-deadening applications.
- For applications to prevent air-leakage.
- For a good seal between PVC & masonry.
- Sealing of sanitary ducts in place where construction passes.

TECHNICAL DATA

SPECIFICATION

Parameters	Standard Testing	Values
Basis		Based on mixture of rubber and polybutene with inorganic fillers, plasticizer and modifiers. On one side laminated fabric.
Stickiness		Very good
Compression for bonding		Positive compression
Chemical resistance		Good against weak acids and alkalis
Possibility to repaint		Yes
Peel Strength		
- Waterproof Membrane	N / 10mm	8
- Concrete Substrate	N / 10mm	10
- Steel Substrate	N / 10mm	10
Temperature resistance	°C	-40 / +90
Heat resistance	80°C, 2 hrs	No Flow and No Cracking
Low Temperature Flexibility	-40°C	No Cracking
Application Temperature	°C	+5 / +40
Shelf Life	months	24 in +5 / +30°C 50% rel. humidity
Presumed lifetime	Years	10

Disclaimers: The information given in this product data sheet is based on laboratory tests and experience which we believe to be correct. Properties quoted are typical and do not therefore constitute a specification. In view of the wide range and variability of substrates, we would advise that our product should be tested by the user to establish suitability for its intended application. E & OE

Product Data Sheet

DIRECTION TO USE

SURFACE PREPARATION

- Application temperature range: +5°C to +40°C
- **KWICKSEAL™GT** must be applied to a clean, dry, smooth and dust-free surface.
- All surfaces should be clean, dry and free from frost, grease and loose materials.
- When applying the tape to porous or friable surfaces, it is recommended that the surface be treated with a suitable SBR primer, to seal and stabilise the surface.
- Not recommended in wet and submerged conditions.

INSTRUCTION TO APPLY

- After the surface has been properly prepared, cut tape to desired length.
- Remove the release liner and position over desired area. Precisely apply the tape directly to the area on the first attempt, as trying to remove may damage the tape.
- Firmly press on all areas of tape with a finger or roller, making sure tape stays conformed to the substrate. Always roll from the center towards the outside to remove any air pockets. Edges must be free of any fish mouths.
- Do not stretch tape during application.

STORAGE

- Always store in original sealed packaging in a dry location, protected against the elements. Store on end to avoid deformation

TOLERANCES

- Thickness ± 10%
- Width: up to 100mm ± 2mm, over 100mm ± 3mm

APPLICATIONS

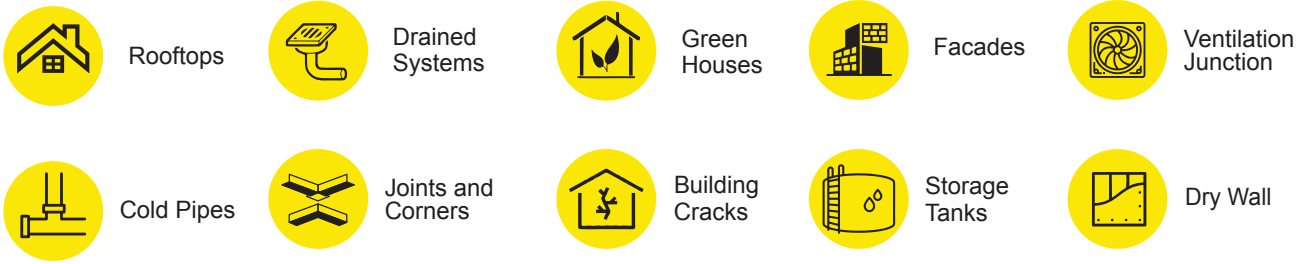

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of KWICKIX products, are given in good faith based on KWICKFIX's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with KWICKFIX's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. KWICKFIX reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

CALL ON *+91 72 7860 7860* TO SPEAK TO OUR SOLUTION EXPERTS

KWICKFIX INDUSTRIES PVT. LTD.

Corporate Office:

Office No.22, Nav Vyapar Bhavan, 49, P D 'Mello Road, Masjid Bunder (East), Mumbai – 400009.

Tel: +91 022 4010 2252 **Email:** sales@kwickfix.co.in

Scan QR code to watch application videos

Disclaimers: The information given in this product data sheet is based on laboratory tests and experience which we believe to be correct. Properties quoted are typical and do not therefore constitute a specification. In view of the wide range and variability of substrates, we would advise that our product should be tested by the user to establish suitability for its intended application. E & OE